



## B7 DC LINEAR SOLENOID


### Availability

DC Standard Stroke  
PULL - THRUST - PULL/THRUST  
DC Long Stroke  
PULL  
(THRUST on request)


**Solenoid shown in energised position**

Weight complete 1.1Kg  
Plunger weight 180g max


Forces shown are at working temperature

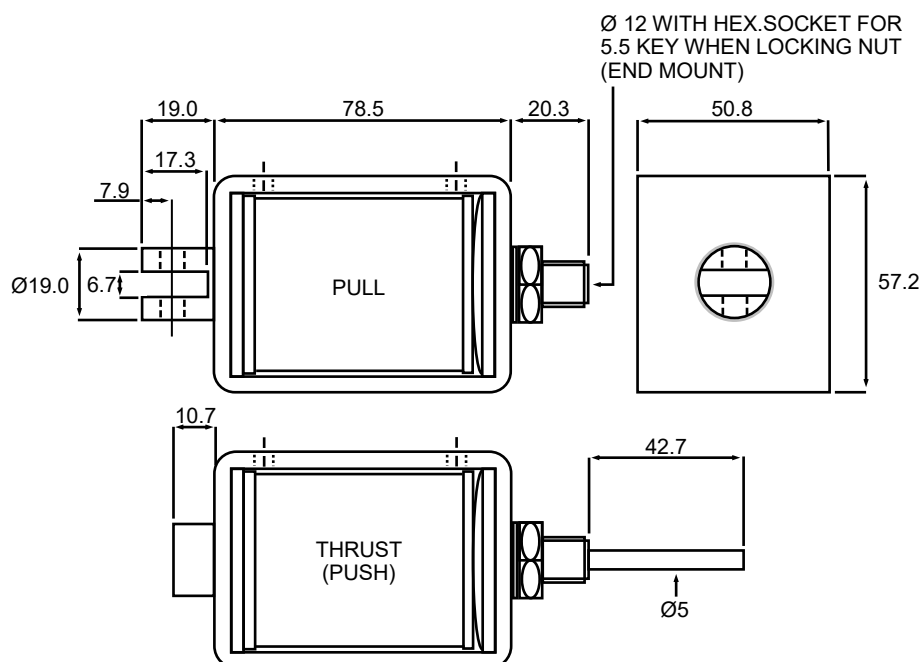

### BDC7

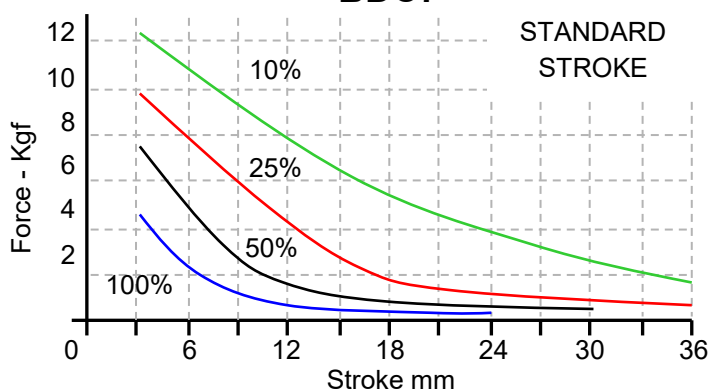

### BDC7L

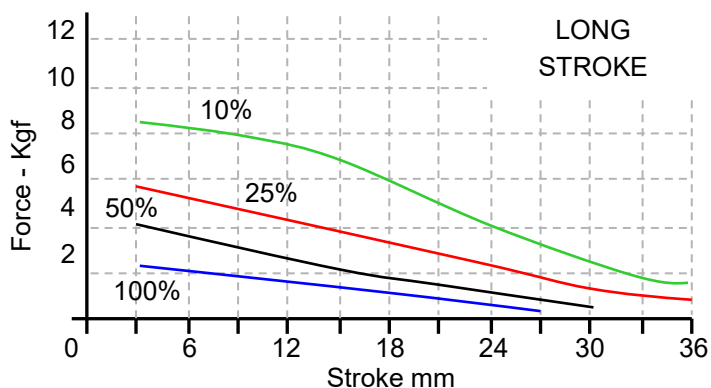

DIMENSIONS IN MM

### DC Watts

100%  $R_{tg} = 20W$

50%  $R_{tg} = 40W$

25%  $R_{tg} = 80W$

10%  $R_{tg} = 200W$

**\*\* Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised \*\***  
We reserve the right to alter or amend designs without prior notice.


**HE & BS Benson Ltd**

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk

## CODING

Please use the standard coding below when advising your design requirement.

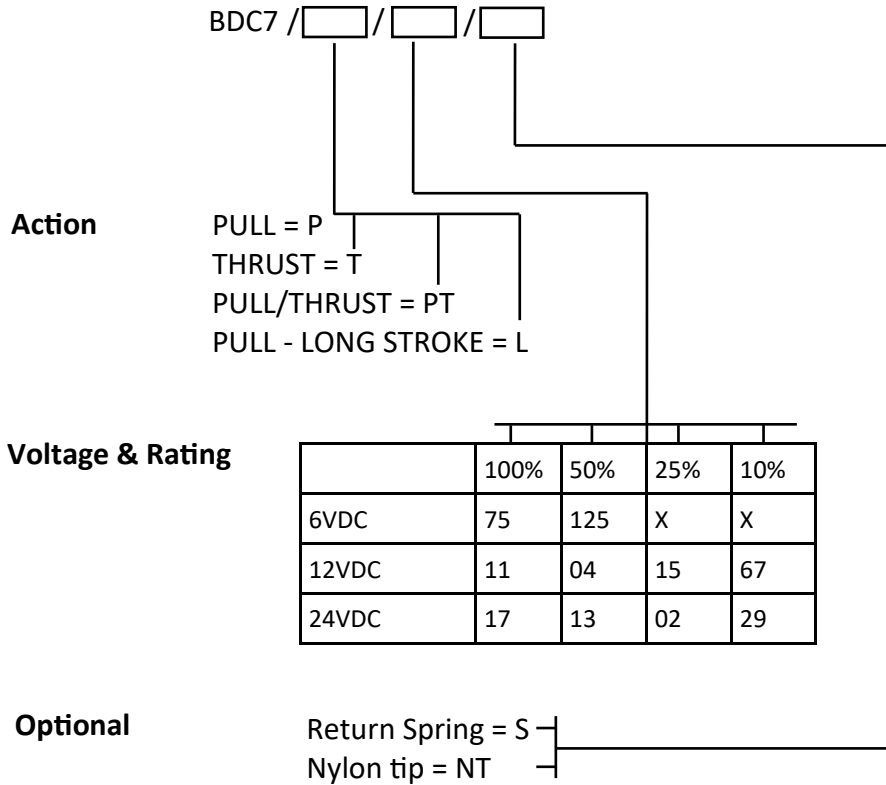

*Example - BDC7 / L / 17 / S*

Other voltages are available on request.

Fixing, plunger coupling, thrust rods and lead length can all be customised.

All solenoids come with flying leads as standard, should you require spade connectors please contact our sales team.

*We reserve the right to alter or amend designs without prior notice.*

**HE & BS Benson Ltd**

**1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR**

**+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk**

B7 Rev 6 - 2019