



## BLM0 DC LATCHING SOLENOID


Availability  
DC only  
PULL & THRUST

Solenoid shown in  
energised position

Weight complete 20g  
Plunger weight 4g max

Solenoid CLOSES with  
**RED** Lead + VE  
Solenoid OPENS with  
**BLACK** Lead + VE

Minimum Pulse duration - 50ms  
De-latch power - 0.5W

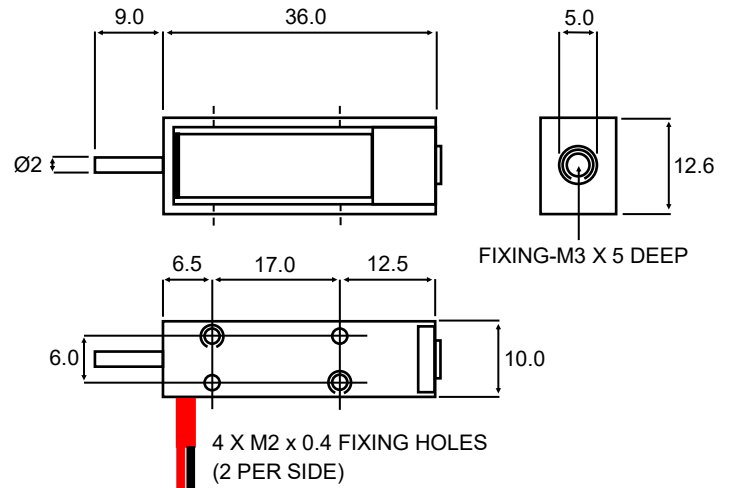


LEADS 200 ONE RED ONE BLACK

DIMENSIONS IN MM

### Magnet Holding Force @ '0'stroke - 350g

Mechanical assistance is required when de-latching  
Return spring fitted as standard

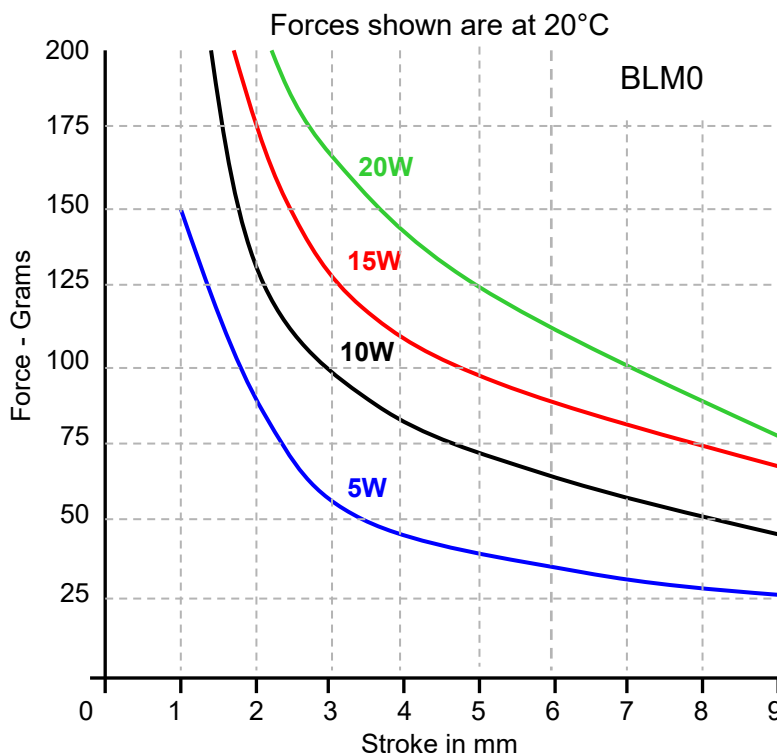

### Example Applications

- Electronic Locks
- Medical Cabinets
- Vending Machines
- Battery Operated Locks

\*\* Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised \*\*  
We reserve the right to alter or amend designs without prior notice.

HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk

BLM0 Rev 6 - 2019

## CODING

Please use the standard coding below when advising your design requirement.

BLM0 /

**Voltage & Rating**

	5W	10W	15W	20W
6VDC	09	10	11	12
9VDC	13	14	15	16
12VDC	17	18	19	20
24VDC	21	22	23	24

*Example - BLM0/19*

Other voltages are available on request.

Fixing, plunger coupling, thrust rods and lead length can all be customised.

*We reserve the right to alter or amend designs without prior notice.*

**HE & BS Benson Ltd**

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ [sales@bensonsolenoids.co.uk](mailto:sales@bensonsolenoids.co.uk) 🌐 [www.bensonsolenoids.co.uk](http://www.bensonsolenoids.co.uk)

BLM0 Rev 6 - 2019