



## BDC2 DC LINEAR SOLENOID


### Availability

For DC Only  
PULL - THRUST - PULL & THRUST  
Side Mount Fixing  
For operation over 50VDC  
please enquire as to feasibility.

**Solenoid shown in  
energised position**


Weight complete 57g  
Plunger weight 10g max

Forces shown at working  
temperature

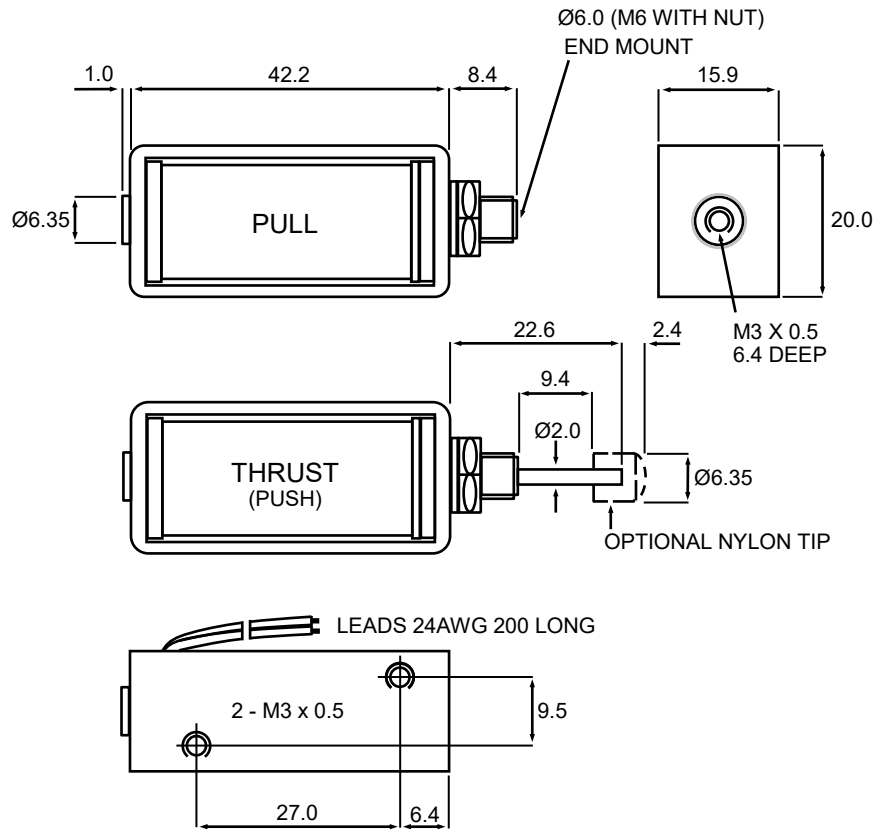

SIDE FIXING OPTION AVAILABLE  
(END MOUNT CAN BE OMITTED)

DIMENSIONS IN MM

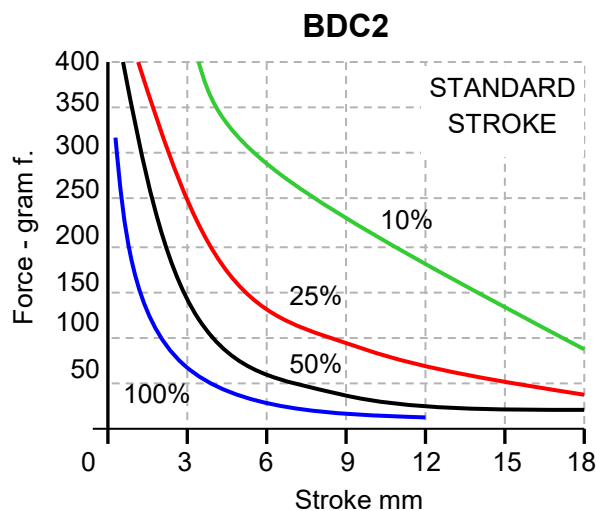

### DC Watts

100% Rt<sub>g</sub> = 5W

50% Rt<sub>g</sub> = 10W

25% Rt<sub>g</sub> = 20W

10% Rt<sub>g</sub> = 50W

**\*\* Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised \*\***  
*We reserve the right to alter or amend designs without prior notice.*


**HE & BS Benson Ltd**

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk

## CODING

Please use the standard coding below when advising your design requirement.

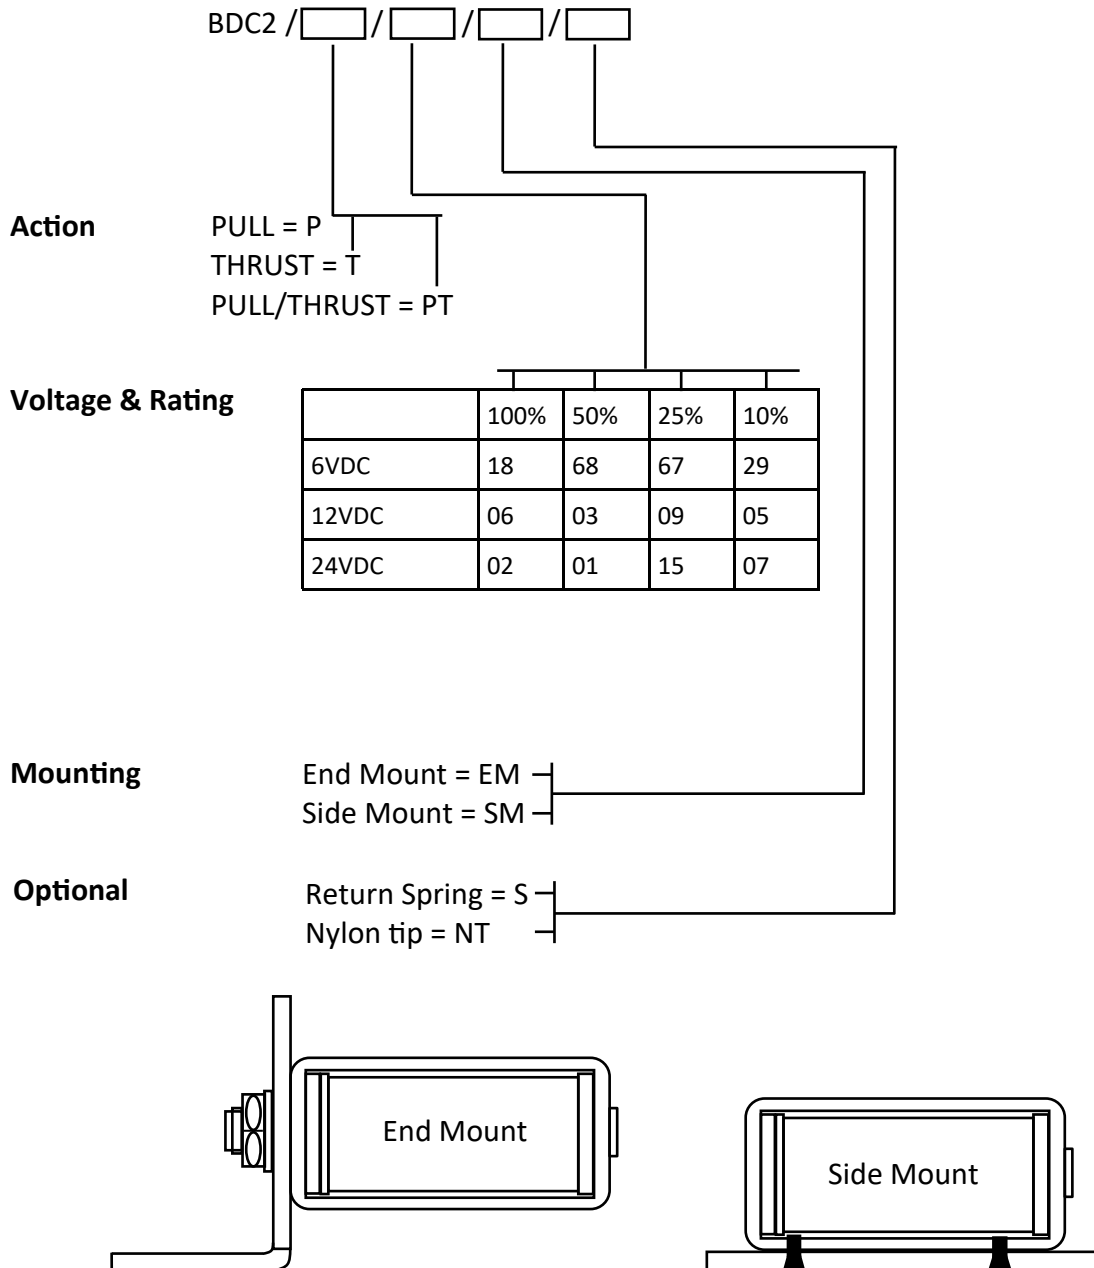

*Example - BDC2 / T / 15 / SM / SNT*

Other voltages are available on request.

Fixing, plunger coupling, thrust rods and lead length can all be customised.

All solenoids come with flying leads as standard, should you require spade connectors please contact our sales team.

*We reserve the right to alter or amend designs without prior notice.*

**HE & BS Benson Ltd**

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk

B2 Rev 6 - 2019